



Wireless pull-wire switch RF 97 WHK/90° SW868 Article no.: on request


Product features

- Thermoplastic enclosure
- Design to EN 50047
- sWave® wireless technology
- Optionally available as SW915B variant (USA, Canada)
- Output signal can be individually configured at the receiver
- Power supply by Lithium battery (replaceable)
- LBT - Listen before Talk Firmware
- Actuator: Offset roller lever with collar WHK
- Including 3.2 m long pull-wire and ball
- Available soon

Notes

- The rope is attached to the lever by a clip which releases the rope if overloaded.

Dimensions

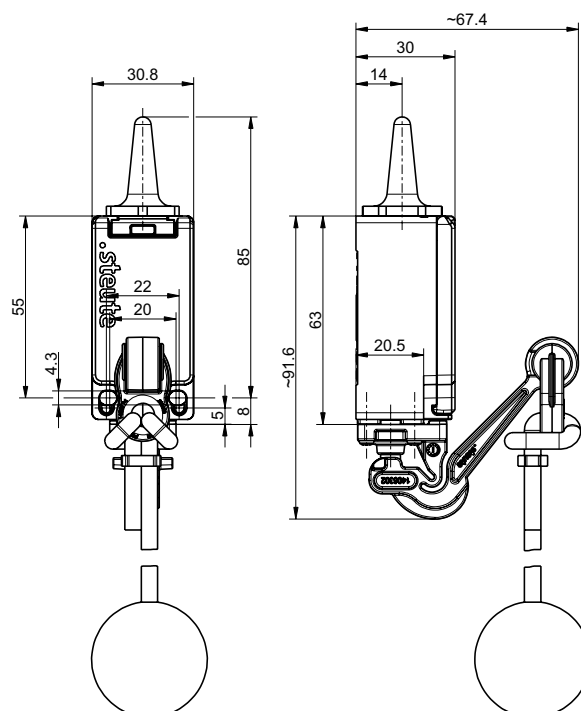

General technical data

Applied standards

EN 60947-5-1, EN 61000-6-2, EN 301 489-3, EN 300 220-2, EN IEC 63000, EN IEC 62368-1

Enclosure

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0, weathering resistant, UV stabilised

Degree of protection

IP67 (IEC/EN 60529)

Safety class

III

Ambient temperature

-25 °C ... +70 °C

Operation cycles

max. 1800/h

Standby current

3 µA

Mechanical life

250 000 operations

Note

status signal – can be individually configured via radio receiver (delivery state: without status signal)
LBT – can be deactivated via radio receiver (e.g. in conjunction with repeaters)
transmission of battery voltage and switching condition
Go to our different wireless receivers to find corresponding how-to videos.

Wireless technology

General

Frequency

868.3 MHz (Europe)

Data rate

66 kbps

Errors and omissions excepted.



Wireless pull-wire switch RF 97 WHK/90° SW868 Article no.: on request

Wireless technology (contd.)

Channel bandwidth

400 kHz

Modulation type

2-FSK

Protocol

sWave®

Transmission power

< 25 mW

Wireless approvals

Europe: RED 2014/53/EU

Function**Telegram rate**

max. 12000 telegrams with repetitions/h

Wireless range

max. 450 m outdoors, max. 40 m indoors

Collision avoidance procedure

LBT - Listen before Talk software

Note

status signal – can be individually configured via radio receiver (delivery state: without status signal)

LBT – can be deactivated via radio receiver (e.g. in conjunction with repeaters)

Go to our different wireless receivers to find corresponding how-to videos.

Voltage supply

Voltage source

lithium battery (replaceable)

System

Li/SOCl₂

Nominal voltage

3.6 V

Nominal capacity

1.2 Ah

Battery life

> 10 years