




Accessories for multi-function handles Coupling M12 x 1, 12-poles 5 m cable straight Material no.: 1179536 (material no. old: 01.36.2316)

Product features

- Coupling for plug-in connector M12 x 1

Dimensions

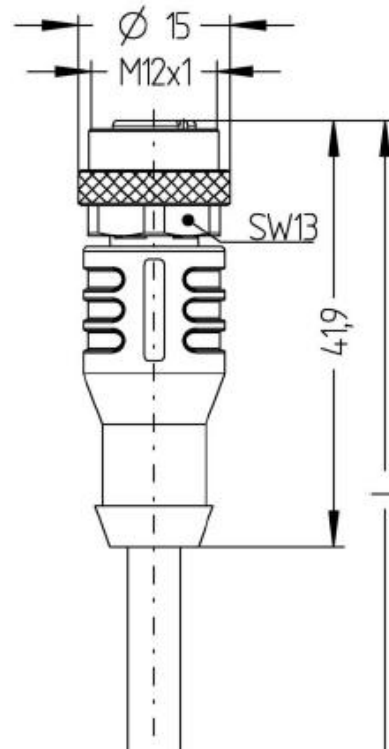

Technical data


Degree of protection IP65, IP67, IP68, only with screws tightened	Rated operating voltage U_e max. 30 V
Mechanical life min. 100 mating cycles	Insulation resistance $\geq 10^8 \Omega$
Connection Pre-wired cable PVC, grey	Current load 1.5 A
Cable length 5 m	Ambient temperature fixed cable: $-25^\circ\text{C} \cdots +80^\circ\text{C}$, moving cable: $0^\circ\text{C} \cdots +80^\circ\text{C}$
Cable diameter 6.1 mm	Weight 250 g
Cable cross-section $12 \times 0.14 \text{ mm}^2$	

Errors and omissions excepted.



Accessories for multi-function handles
Coupling M12 x 1, 12-poles 5 m cable straight
Material no.: 1179536 (material no. old: 01.36.2316)

Plug-in configuration

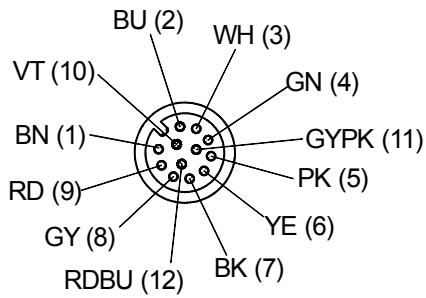

Errors and omissions excepted.