



Wireless magnetic sensor RF RC M10 1S ST 0,5 m Material no.: on request


Product features

- Metal enclosure
- 1 Reed contact
- Actuation from front and from side
- Switching distance up to 41 mm depending on the actuating magnet
- To be connected to RF 96 ST or RF I/O universal transmitter
- With M12 coupling, 4-pole

Notes

- 2 mounting nuts are included in delivery

Dimensions

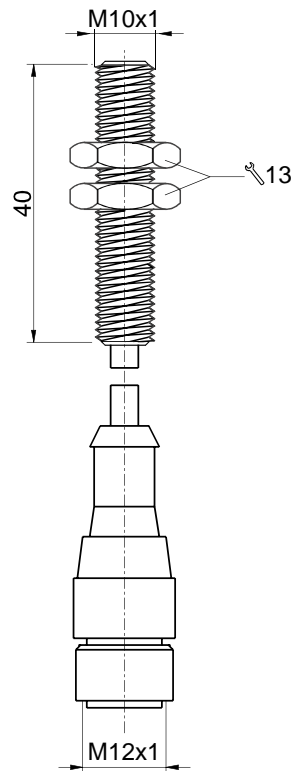

Technical data

Applied standards EN 60947-5-2
Enclosure brass, nickel
Degree of protection IP67 (IEC/EN 60529)
Switching system reed contacts
Switching elements 1 NO contact
Connection Coupling M12 x 1, 4-pole
Cable length 0.5 m
Switching voltage max. 250 VAC/DC

Switching current max. 0.5 A
Switching capacity max. 50 W/VA
Switching frequency see RF 96 ST / RF I/O
Ambient temperature -20 °C ... +80 °C
Vibration resistance 20 g

Note


The sensor may only be used in combination with RF 96 ST or RF I/O

Errors and omissions excepted.



Wireless magnetic sensor
RF RC M10 1S ST 0,5 m
Material no.: on request

Plug-in configuration

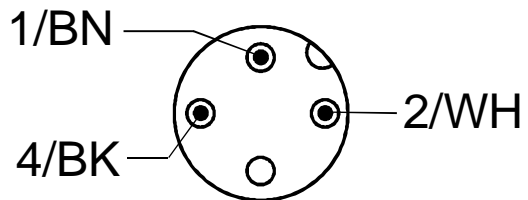

Errors and omissions excepted.