



## Wireless magnetic sensor RF RC M10 1S ST 1 m Material no.: on request


### Product features

- Metal enclosure
- 1 Reed contact
- Actuation from front and from side
- Switching distance up to 41 mm depending on the actuating magnet
- To be connected to RF 96 ST or RF I/O universal transmitter
- With M12 coupling, 4-pole

#### Notes

- 2 mounting nuts are included in delivery

### Dimensions

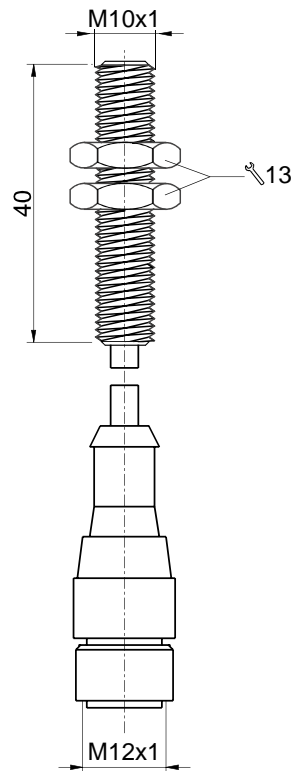

### Technical data

<b>Applied standards</b> EN 60947-5-2
<b>Enclosure</b> brass, nickeled
<b>Degree of protection</b> IP67 (IEC/EN 60529)
<b>Switching system</b> reed contacts
<b>Switching elements</b> 1 NO contact
<b>Connection</b> Coupling M12 x 1, 4-pole
<b>Cable length</b> 1 m
<b>Switching voltage</b> max. 250 VAC/DC

<b>Switching current</b> max. 0.5 A
<b>Switching capacity</b> max. 50 W/VA
<b>Switching frequency</b> see RF 96 ST / RF I/O
<b>Ambient temperature</b> -20 °C ... +80 °C
<b>Vibration resistance</b> 20 g

#### Note

The sensor may only be used in combination with RF 96 ST or RF I/O


Errors and omissions excepted.



Wireless magnetic sensor  
RF RC M10 1S ST 1 m  
Material no.: on request

## Plug-in configuration

---

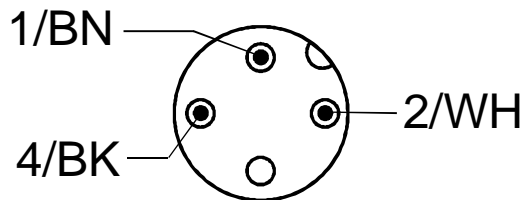

Errors and omissions excepted.